
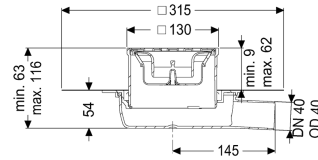


## The Ultraflat 54 floor drain DN 40, WaD, Slotted grating

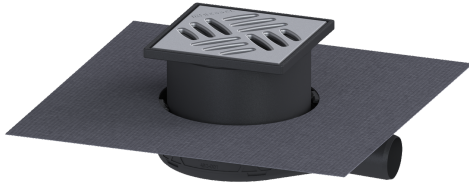

### Article information

Item no.: 44740.20M  
 GTIN: 4026092080757  
 Price group: 10

### Advantages

- including removable odour trap in the upper section
- Low installation depth
- Scientifically confirmed sound insulation effect

### Description

The Ultraflat 54 floor drain is suitable for indoor floor drainage. The polymer drain is equipped with a removable odour trap in the upper section. Open seepage water opening, no flooding of the waterproofing level in the event of build-up.

|  |  |
|--|--|
| Variant  |  |
| System:  | 125  |
| Seepage opening:   | optional   |
| Waterproofing layer on the drain body:                                   | Factory-fitted sealing collar (WaD) according to DIN 18534 |
| Water exposure class in accordance to DIN 18534-1 (up to and including): | W3-I   |
| Sealing water height:  | 22 mm  |
| General characteristics  |  |
| Nominal size (DN):   | 40   |
| Outer diameter (OD):   | 40 mm  |
| Odour trap:  | included   |
| Dimensions   |  |
| Vertical adjustment:   | 63 - 116 mm  |
| Net weight:  | 0,69 kg  |
| Gross weight:  | 0,77 kg  |
| Type of height adjustability:  | vertically adjustable upper section                        |
| Length:  | 246 mm   |

|                         |   |
|-------------------------|---|
| Width:                  | 200 mm  |
| Height:                 | 54 mm   |
| Packaging dimension:    | length  |
| Packaging dimension:    | width   |
| Packaging dimension:    | height  |
| Tank/drain body         |   |
| Number of outlets:      | 1   |
| Material of drain body: | ABS   |
| Coverage features       |   |
| Type of cover:          | Slotted cover                                       |
| Cover material:         | Stainless steel 14301                               |
| Colour of cover:        | silver  |
| Width of cover:         | 120 mm  |
| Height of cover:        | 16 mm   |
| Length of cover:        | 120 mm  |
| Frame material:         | ABS   |
| Locking:                | unlocked  |
| Load class:             | K 3 (EN 1253-1)                                     |
| Slip resistance class:  | R9 according to DIN 51130; C according to DIN 51097 |
| Rim width:              | 130 mm  |
| Rim length:             | 130 mm  |
| Shape of upper section: | square  |
| Upper section material: | ABS   |