



The Ultraflat 54 drain body DN 50, enclWPM, Odour trap 22 mm

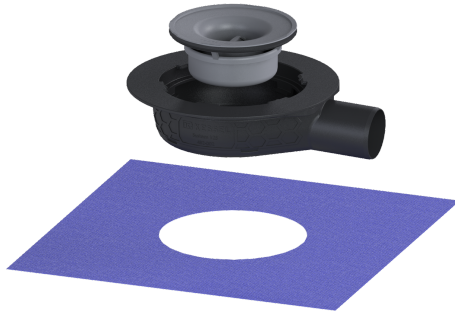

Article information

Item no.: 44750
 GTIN: 4026092080726
 Price group: 10

Advantages

- including removable odour trap in the upper section
- Low installation depth
- Scientifically confirmed sound insulation effect

Description

The drain body for floor drains. The Ultraflat 54 is made of polymer and is equipped with a removable odour trap for installation in an upper section. Open seepage water opening, no flooding of the waterproofing level in the event of build-up.

| | |
|--|---|
| Variant | |
| System: | 125 |
| Seepage opening: | optional |
| Waterproofing layer on the drain body: | Enclosed sealing collar to be glued (bd) according to DIN 18534 |
| Water exposure class in accordance to DIN 18534-1 (up to and including): | W2-I |
| Sealing water height: | 22 mm |
| General characteristics | |
| Nominal size (DN): | 50 |
| Outer diameter (OD): | 50 mm |
| Odour trap: | included |
| Dimensions | |
| Net weight: | 0,36 kg |
| Gross weight: | 0,4 kg |
| Length: | 246 mm |
| Width: | 200 mm |
| Height: | 54 mm |

| | |
|----------------------|--------|
| Packaging dimension: | length |
| Packaging dimension: | width |
| Packaging dimension: | height |

| | |
|-------------------------|-----|
| Tank/drain body | |
| Number of outlets: | 1 |
| Material of drain body: | ABS |